



Catalog Number 11426
UPC Number 60198611426
Description Nylon Insulated Ring Terminals
2 AWG




Features

Color Coded insulation for easy identification
Manufactured from high strength copper alloy
Electro-tin plated for corrosion resistance
Expanded Insulation funnel entry eliminates strand “Hang Up”, increases the crimping rates and the reliability of the termination
Wire range stamped on the surface for easy interpretation
Brazed seam prevent splitting under maximum pressure
Serrated barrel & flared position of sleeve provides excellent contact & mechanical stress relief at insulation & barrel junction

General

Insulation Type Nylon
Material Copper
Finish Electro-tin plated
Color Red
Wire Range 2 AWG
Stud Size 7/16



Dimension Information

L Inches (mm) 2.193
W Inches (mm) 0.866
D Inches (mm) 0.571
d1 Inches (mm) 0.37
d2 Inches (mm) 0.453
E Inches (mm) 1.063
F Inches (mm) 0.697
T Inches (mm) 0.071

Specifications

Temperature Rating 105°C
Voltage Rating 600 V
Flammability Rating UL94V-O
Amp Rating 2 AWG 170 Amps

Packaging


Bag Qty 100
Master Bag Qty 1000

Certifications

UL Yes
cUL Yes
RoHS Yes

Morris Products 53 Carey Road, Queensbury, NY 12804

www.morrisproducts.com

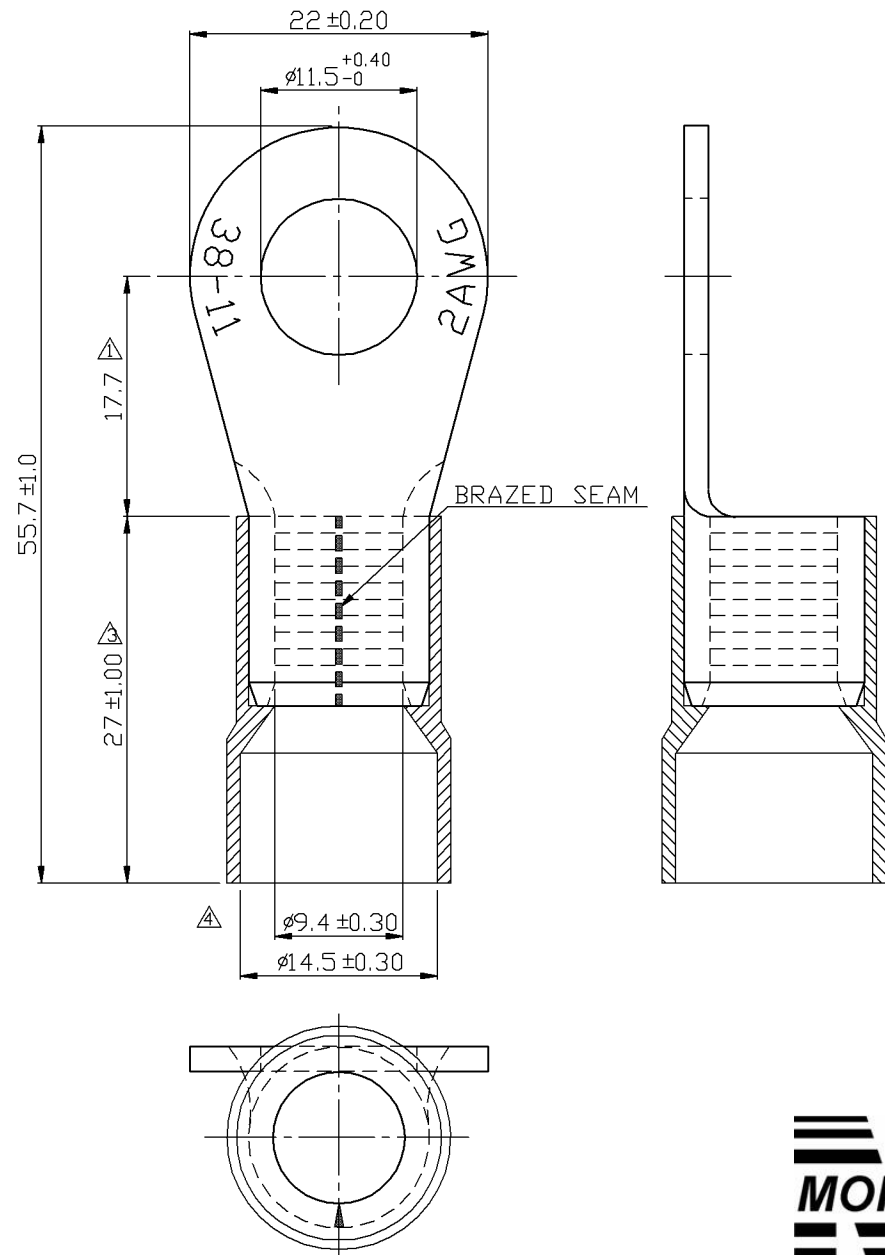

REV	DESCRIPTION	DATE
△	RDK-98020	2009/09/01
△	B210- -91018	2009/09/02
△	RDC-99169	2010/06/15

- NOTE :
1. MAXIMUM ELECTRIC CURRENT : $\frac{\text{A.W.G.} | 2}{\text{AMP.} | 170}$
 2. MAXIMUM ELECTRICAL RATING : 105°C 600 VOLTS MAX.
 3. INSULATION MATERIAL : NYLON
 4. INSULATION COLOR : RED
 5. TERMINAL MATERIAL : COPPER
 6. WIRE RANGE : 2 A.W.G. (38 mm²)
 7. TERMINAL SURFACE TREATMENT : TIN PLATED
 8. TERMINAL THICKNESS : 1.8 mm

Tolerance Unless Otherwise Specified	
0 >	mm ± ANGLE
>	mm ± 0° ° REF ±
>	mm ± ° ° ±
>	mm ± ° ° ±

NAME	NYLON-INSULATED RING TERMINALS			UNIT	mm	
PART NO.	11426	MATERIAL	----	APPROVE		
NUMBER		SCALE		SHEET	PAGE	CHECKED
DATE	2006/05/29	2/1	1-4	10F2	DRAWN	



Morris Products Inc.