



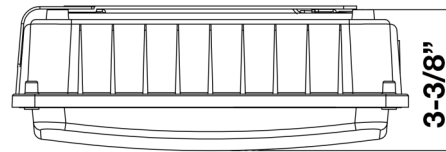

# ULTRATHIN CANOPY SURFACE MOUNT 70W


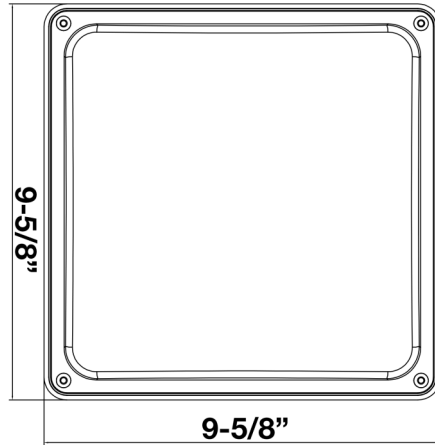


**Features:**

- Thin Appearance
- Good Heat Dissipation
- Convenient Installation
- Pendant or Surface Mount
- Long Life high Efficiency LEDs

Part#	Housing Color	Wattage	Lumens	CCT	Voltage	Dimming	Lumens/Watt	DLC#
71610B	White	70W	8020	5000K	120-277	0-10V	114	PLH1SCRFCCK0U

**PHOTOMETRY**

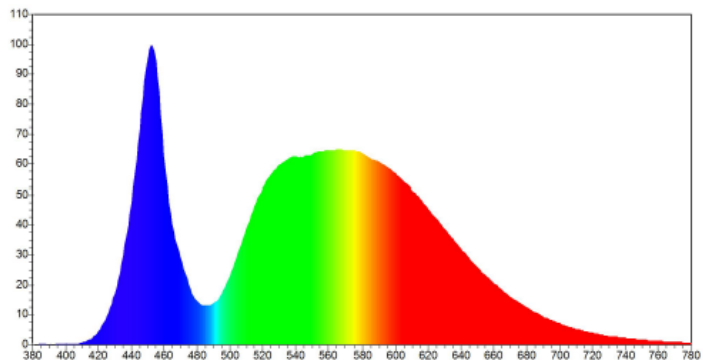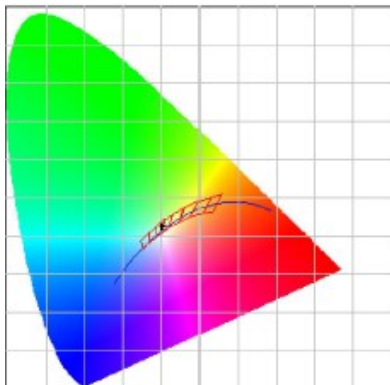



# ULTRATHIN CANOPY SURFACE MOUNT 70W

## Technical Specifications:

### **Electrical:**

Input Voltage: 120 thru 277

Current: .568A@120V; .284A@277V

Frequency: 60Hz

Power Factor:  $\geq .9$

### **Product Parameters:**

70 Watts

Efficacy: 114 lumens per watt

50,000+ LED Life Span

CCT: 5000k (Cool White)

### **Chromacity Measurements:**

Beam Angle: 140°

BUG Rating: N/A

CRI:  $\geq 70$

R9: -21

DUV: 0.0059

Chromaticity (x,y): x=.3454; y= .3639

Chromaticity (u,v): u=.2069; v= .3270

### **Component Specifications:**

LED: SSC3030

Driver: 120-277V 50-60HZ

Driver Output Volts: 120-277

Driver Output Amps: 205mA

Surge Protection: 10,000V

**Dimming:** 0-10V

### **Operating Temperature:**

Minimum Starting -31° - 122° F

### **Construction:**

Housing: Aluminum Housing

Powder Coat White Finish

IP Rating: IP65 Wet Location Rated

Lens Material: Prismatic Polycarbonate Lens

Mounting: Ceiling Mount

(Drywall / Sheetrock)

Listings: ETL

DLC#: PLH1SCRFCK0U

Carton Qty: 1

Weight: 8 lb

Warranty:

Morris Products carries a 5 year warranty from date of purchase against defects in materials and workmanship (assuming normal and proper usage).